

LUT-SHUNT-FM

Shunt Relay for Line Voltage Applications (SPDT)

Project:

Model No.:

Comments:




APPLICATION

LVS is proud to announce its latest addition to the popular Shunt Line. The LUT-SHUNT-FM includes a 3A rated Form C (N/O+N/C) relay and is UL924 Listed for emergency lighting control applications.

The LUT-SHUNT-FM can bypass either a line voltage switch or a DALI dimming signal, ensuring that an emergency fixture illuminates at full brightness during a utility power interruption.

Its slim profile fits most fixture ballast channels or wiring compartments. An integral test switch and LED allow for quick testing and verification of proper function.

MOUNTING

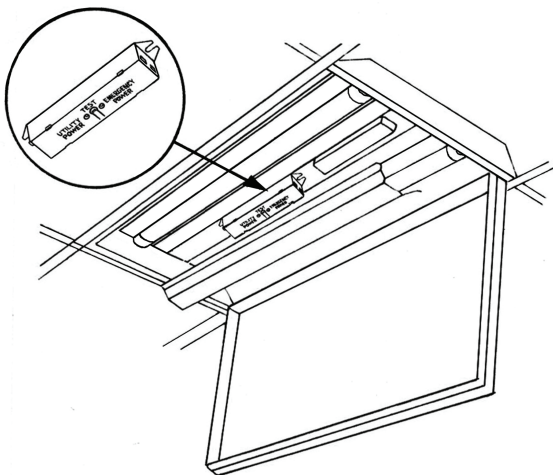

FEATURES

The powerful LUT-SHUNT-FM includes:

- N/O & N/C Dry Contact
Used for bypassing line voltage switches, occupancy sensors or dimmers. Also used as dry contact to signal relay panels or BMS systems or utility power interruption
- Integral test switch and green utility power indicator
- UL924 Listed



LED COMPATIBLE



UL924 LISTED




WARRANTY

Gary Gilgur
EM Supply LLC



(973) 650-0853
Sales@EM-Supply.com
www.EM-Supply.com

WIRING DIAGRAM

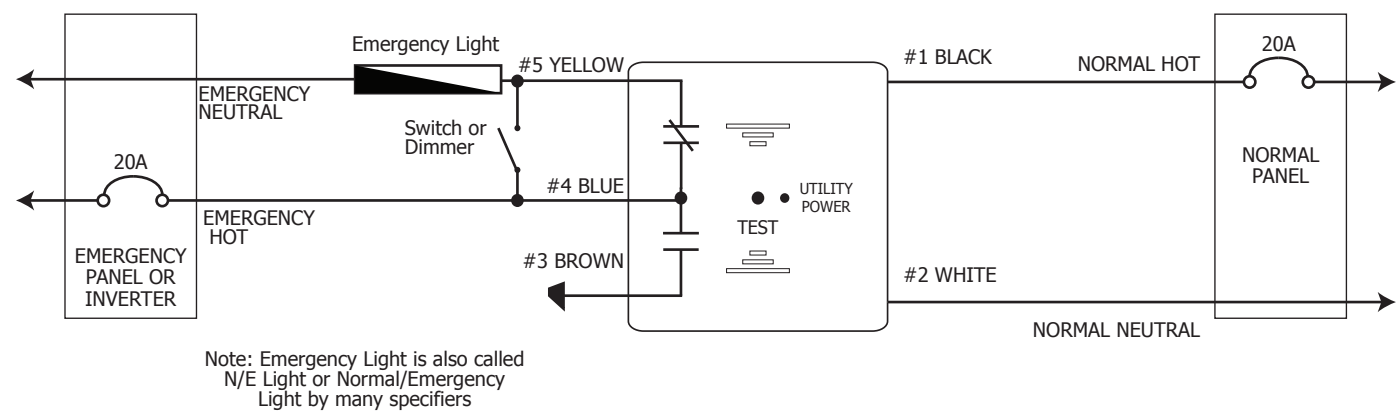

SPECIFICATIONS

ELECTRICAL	MODEL NO.	LUT-SHUNT-FM
	SENSING INPUT	120V - 277V
	LED LOAD RATING	3A (120-277V)
	BALLAST LOAD RATING	5A (120-277V)
	INCANDESCENT LOAD RATING	360W (120V) / 500W (277V)
	WARRANTY	5 Year Replacement Warranty
	DC RATING	May be used for 1A (0-30VDC)

MECHANICAL	MOUNTING	Fixture Mount, Panel Mount
	RATING	UL94V-0A, Damp Location Rated
	SHIPPING WEIGHT / COLOR	8 oz. / Black
	TEMPERATURE	-40°F - 149°F (-40°C - 65°C)
	SIZE	125mmx25.4mmx30mm" (L x H x W body) Mounting feet approx 145 mm on center

Note: The LUT-SHUNT-FM is intended to control one light fixture, for multiple fixtures please use LUT-SHUNT

ORDERING INFORMATION

LUT-SHUNT-FM

ADDITIONAL RESOURCES

- Installation Sheet
 - FAQ Sheet
 - Alternative Wiring Sheet
 - Terms & Conditions/Warranty Information
 - Fire Alarm Tie-In/Override
- www.lvscontrols.com/assets/UL924FAI.pdf

